



BAL - 29 RATED

Biowood cladding meets the requirement for bush fire resisting timber and is deemed to be acceptable to withstand exposure up to BAL-29 conditions, as specified in AS 3959:2009 Construction of Buildings in bushfire prone areas Appendix F.



**TERMITE
RESISTANT**



**WATER
RESISTANT**



**NATURAL
TIMBER LOOK**


**BIOWOOD®
GARAGE DOORS**

Steel-Line's Biowood® garage door retains the natural timber look and feel, is low maintenance and meets the standard for fire safety under BAL-29 conditions.

There are several good reasons to choose a Biowood® garage door for your home. The Biowood® wood composite products are created using 0.85 density natural cellulose fibre from plantation harvested timber combined with a specially formulated resin. It retains the aesthetic natural look and feel of wood, is lightweight, provides a high degree of water resistance, does not bleach, split, crack, and is suitable for both bushfire regions up to BAL-29 rating and marine applications. The product is termite resistant, low maintenance and is green certified by Global Green Tag. It is the perfect durable product for all building applications.

With the Biowood® sanded finish and unique coating process, these doors are not only beautiful to look at, but are also robust, versatile and designed to withstand the harsh Australian climate.

BIOWOOD® GARAGE DOORS

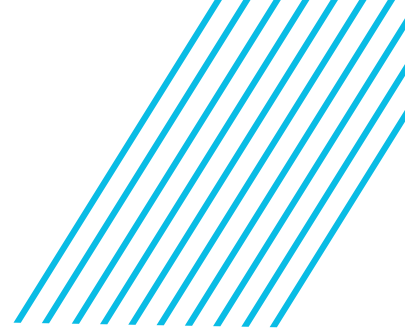

Why you should choose a Biowood® garage door

- Retains the natural aesthetic timber look and feel
- Light weight
- Designed to withstand the harsh Australian climate - no splinters, cracks, warping, cupping or rot
- Durable – water, mould, mildew, and termite resistant
- Bushfire resistant (conforms up to BAL-29 as per AS 3959:2009 Appendix F)
- Time tested suitability for marine, intertidal and salt spray environment
- UV stable under normal environmental conditions, even in full sun, when coated with Biowood® water based coating
- Easy and concealed installation
- Virtually maintenance free – depending on north orientation, coating will last for 3 times longer than normal UV coating
- Environmentally friendly – sustainable timber alternative, fully recyclable
- Can be re-sanded & re-sealed
- Option to stain in variety of colours
- Trusted brand by Global Green Tag

Profile and Colour Options

Providing Australian homeowners with both durability and style, the Biowood® garage doors come in three attractive colours: Spotted Gum, Jarrah and Weatherwood.

These garage doors are constructed using Biowood® architectural profiles and are available in 150mmx18mm Shiplap, 65mmx16mm Slat and 88mmx12mm Tongue & Groove profiles.

| Profiles | Colours | | |
|--|--|---|---|
| | Spotted Gum | Jarrah | Weatherwood |
| <p>150mmx18mm Shiplap</p>  |  |  |  |
| <p>65mmx16mm Slat</p>  |  |  | N/A |
| <p>88mmx12mm Tongue & Groove</p>  |  |  | N/A |

Please note: The colours shown are a guide only. The limitations of printing processes make extremely accurate matches impossible. We strongly recommend comparing your choice with actual samples. As Biowood® is a predominately natural product, variations in colour and finish may be evident. Additionally, Steel-Line reserves the right to vary or delete colours without notice.

MD02-03DS-27BGD-V1 (2016)

Copyright © Steel-Line Garage Door Australia. All rights reserved.

Proudly distributed by: